

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/002283 A1

(51) International Patent Classification⁷: **A47K 11/02,**
E03D 5/014

(21) International Application Number:
PCT/IB2003/002463

(22) International Filing Date: 25 June 2003 (25.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002/5133 26 June 2002 (26.06.2002) ZA

(71) Applicant and

(72) Inventor: **LA TROBE, Brian, Essex [ZA/ZA];** 40 Alphen
Close, Wroxham Avenue, 2056 Paulshof (ZA).

(74) Agent: **BOWMAN GILFILLAN INC. (JOHN & KER-**
NICK); P.O. Box 3511, Halfway House, Midrand 1685
(ZA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG,
US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: **AN AEROBIC DIGESTION TOILET**

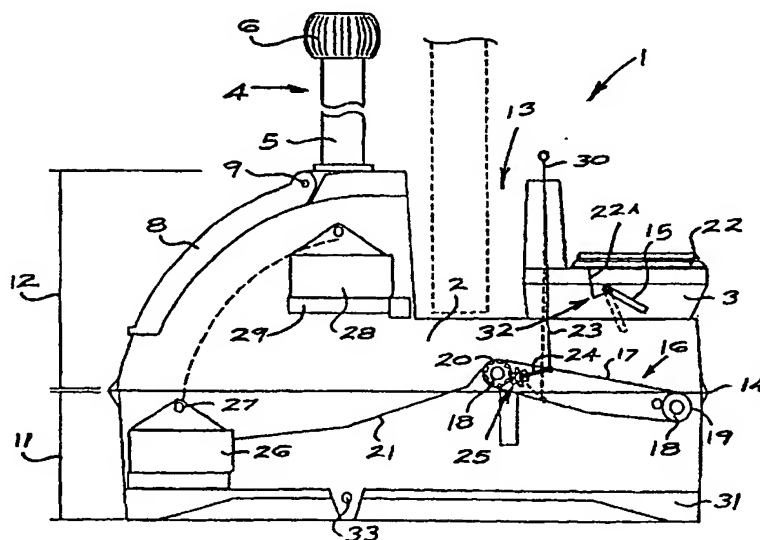

(57) Abstract: An aerobic digestion toilet (1) including a chamber (2) and a toilet bowl (3) above the chamber, said chamber having an outlet vent (4) and means for generating convection flow through the chamber from adjacent the floor thereof through the outlet vent from the chamber, whereby a conveyor (16) is mounted within the chamber and is located below the toilet bowl and configured to receive material falling from the toilet bowl and move it upwardly at an incline to discharge onto a downwardly inclined tray (21) for subsequent disposal.